


# ACTIVE SLIM


## Electric Storage Water Heater for DHW Vertical wall installation

### Technical Features

- 42 cm wide.
- Enamelled steel tank with anti-corrosion protection.
- Dielectric hoses with high mechanical resistance.
- Direct immersion electric heating element.
- Control panel led with temperature level selected and errors signaling.
- Water heater On/Off and temperature adjustment key.
- Self-learning function, Eco Smart operation indicator.
- “Dry-Firing” protection that prevents turning on the water heater if it is not filled with water before connecting.
- LED display in case of failure of the safety thermostat and overheating.
- Non-return and pressure relief valve.
- High quality insulation against heat losses.
- Supplied with 1m main cable and plug for electrical connection.
- Thermostatic valve offered as accessory.

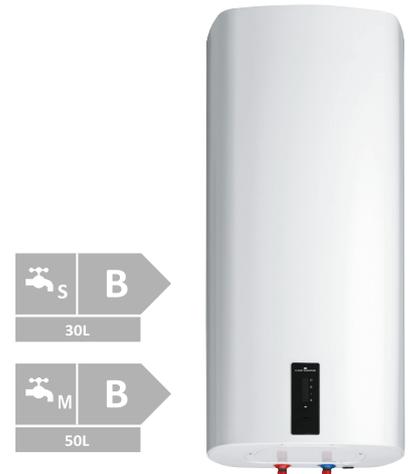

ACTIVE SLIM MODEL		GTD-30	GTD-50
Capacity	L	30	50
Output	W	2000	2000
Current	A	8,7	8,7
Voltage		230 V~	230 V~
Insulation		Class I	Class I
IP degree		IP24	IP24
Colour		White	White
Average consumption to keep water at 65 °C <sup>(1)</sup>	kWh/24h	0,69	0,94
Heating time 65 °C from 10 °C		59 min	1 h 38 min
Quantity of water available with 40 °C mixture <sup>(2)</sup>	L	45	68
Water connections		1/2"	1/2"
Net weight without water	kg	18	22
Dimension A	cm	51	69
Dimension B	cm	31	47
Dimension C	cm	23,5	25
Dimension G	cm	18	26
Width	cm	42	42
Depth	cm	44,5	44,5
Internal code		90840030	90840050
EAN13		8432336790362	8432336790386

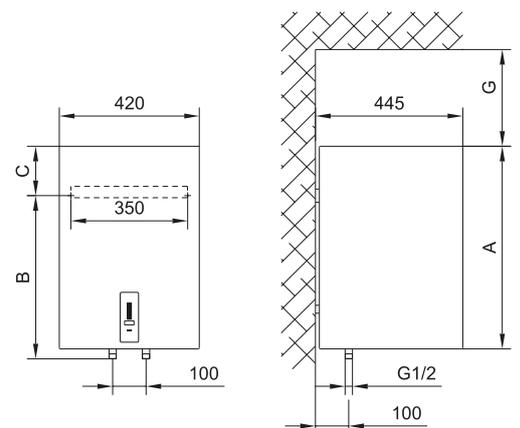

VERTICAL INSTALLATION

Energy classification according to European Regulation 812/2013. (1) Valid values for an ambient temperature of 20°C and 65°C hot water temperature in the heater (Standard EN 60379: 2005). (2) Standard EN 50440.