

## Portable High Power Fan Heater

Electric portable fan heater made of steel sheet epoxy painted in RAL-9006, protected with a layer of varnish and aluminum front profile.

This model, like the rest of the AER-PE range, has digital temperature and ventilation control included in the equipment.

Manual reset thermal protector disconnecting the equipment in the event of overheating and timer to evacuate residual heat.

## **Technical specifications**

Protection degree | IP34

Temperature range 5° to 35°C

Frequency 50/60Hz

Temperature limiter | 120°C




For use in drying plastered or painted areas, building sites, greenhouses, factories, industrial buildings, livestock farms and other temporary facilities.



Customised on demand.



**Dimensions (mm)** 

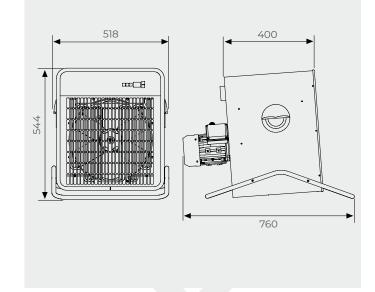



TYPE	CODE	V	kW	STAGES	FLOW RATE	NOISE LEVEL	KG
AER-PE27	82055	3N~400	27	18/27	5750 m³/h	71 dB (A)	34